



Low Frequency Speaker LF100



INTRODUCTION:

Nominal Impedance: **8ohms only**

Nominal Power Handling: 100w

Frequency Response: 125HZ-1KHZ

Operating Temperature: - 40°C to + 65°C


Housing Material: Durable Glass Filled Plastic

Bracket and Hardware Material: Stainless Steel

Dimensions: (13.7cm) D
(16.5cm) H

The speaker is omni directional therefore can be mounted to the front or rear of the vehicle.

Note: The speaker grill needs to have a clean sight of line with the ground. You can rotate the front cowl according to your mounting position.

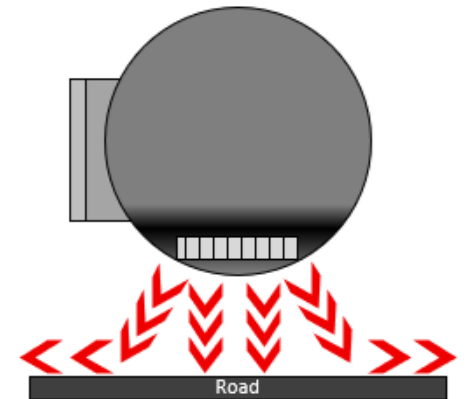

WARNING

- HIGH CURRENT interconnects must be properly terminated. Poor crimp quality can cause heat build up and fire. Follow crimp connector manufacturer instructions.
- DO NOT install this product or route any wires in the Air Bag Deployment Zone. Refer to vehicle owners manual for deployment zones.
- Do NOT use system to disconnect headlights, brake lights or other safety equipment.
- Unit may become hot to touch during normal operation.
- Failure to properly install connectors, fuses or wiring may cause vehicle failure or fire.
- Installation must only be performed by trained technician. Installer must determine vehicle wiring configuration and proper integration of system.
- Use proper wire gauge. All power wires connecting to positive (+) or negative (-) battery terminal or local chassis ground (-) must be sized to supply at least 125% of maximum current and properly fused at power source.

MOUNTING INSTRUCTIONS:

- When installing, position the speaker with the mesh cover facing down.

